


# NOVA Memory Lighting Desks

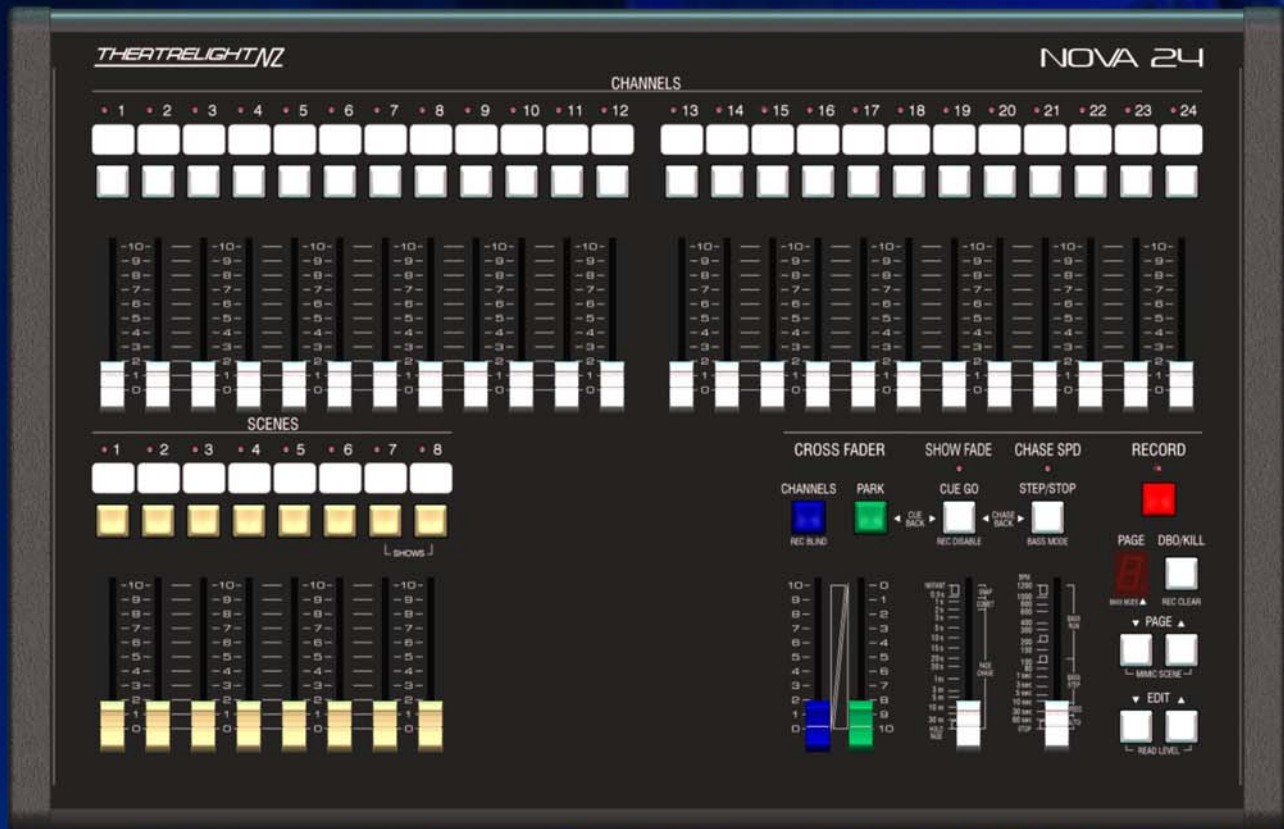

- Available in 24 or 36 channel models
- 10 pages of 8 or 18 submasters (depending on model)
- Each submaster can record a scene, a chase or a show
- Record beat function for synchronising chase speed to live music
- Sound to Light operation
- Remote step and external audio input

E-mail: [info@theatrelight.co.nz](mailto:info@theatrelight.co.nz)  
6 Rowe St., Onehunga, Auckland, New Zealand  
Tel: 64-9-622 1187, Fax: 64-9-636 5803  
Web: [www.theatrelight.co.nz](http://www.theatrelight.co.nz)

**THEATRELIGHT NZ**

# Memory Lighting Consoles

# NOVA


The Theatrelight Nova is designed to be versatile, reliable and easy to use and bring controlled lighting into an affordable range.

The Nova is equipped with scenes, multiple chase speeds, recordable Up/down fade times and the ability to record a scene on one button. The control output from the Nova is USITT (1990) DMX-512 industry standard protocol. Its simple operation make this one of the easiest memory lighting consoles on the market.

Applications include disco, studio and location lighting, theatres, events, interior and exterior lighting requiring lighting control.

## FEATURES

- Available in 24 or 36 channel models
- Standard DMX-512 USITT 1990 output
- 10 pages of submasters
- 8 or 18 memory submasters on each page (depending on model)
- Each submaster can record a scene, a chase or an entire show
- Dipless crossfade
- Record and erase protection codes
- Record beat function for synchronising chase speed to live music
- Sound to Light operation
- Remote step and external audio input

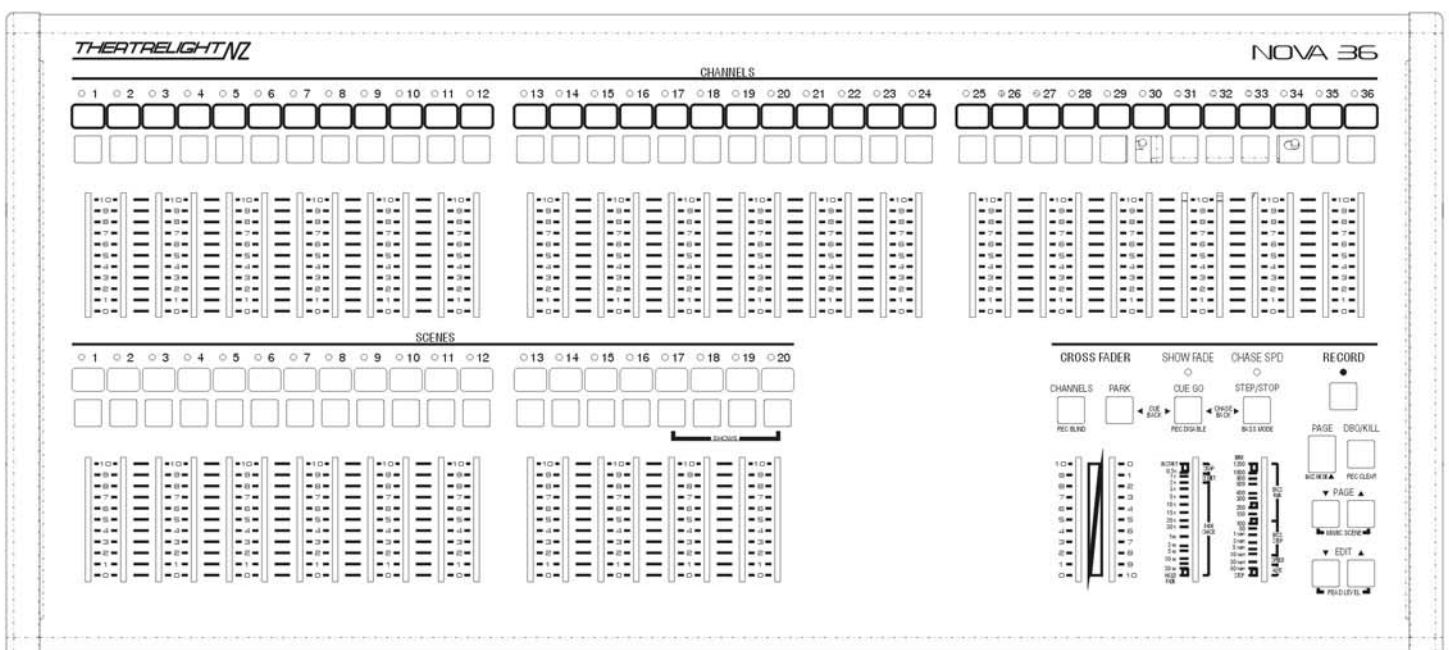

## Specifications

**Construction:** Powder coated corrosion protected steel frame

**Faders:** 60mm stroke linear faders with custom moulded ABS knobs

**Flash Keys:** Long life heavy duty computer keys with ABS caps

**Electronics:** CMOS micro-processor with 5 year lithium backup battery CMOS memory

**Power Supply:** 100~120 or 220~240VAC with 4 pin male XLR power socket via external 4 pin XLR plug 100~120 or 220~240VAC

**Control Output:** DMX-512 USITT (1990) Digital Multiplex System via 5 pin XLR male socket


**Remote Step Control:** Cue Go, Cue Back and Show Reset via 6.25mm stereo jack socket (short to earth)

**External Audio Input:** Non amplified 6.3mm mono jack

**Internal Microphone:** Omni-directional Electret Microphone insert

## Dimensions

Model	Length	Weight
Nova 24	535mm	6Kg
Nova 36	773mm	9Kg

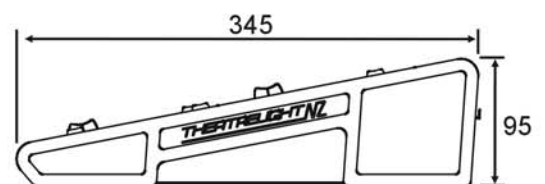

Your Local Distributor:

# THEATRELIGHT NZ

Theatrelight Ltd, 6 Rowe St. Onehunga, Auckland, New Zealand  
 Tel: 64-9-622 1187, Fax: 64-9-636 5803  
 Internet: www.theatrelight.co.nz, e-mail: info@theatrelight.co.nz