## TL-DIVIX-SP-U

Compact 4 way isolated DMX splitters




- 4 isolated DMX outputs
- Isolated DMX input
- 3 or 5 pin XLR versions: SP-4-3, SP4-5
- Compact mount-anywhere cases

Theatrelight New Zealand email: info@theatrelight.co.nz web: www.theatrelight.co.nz

THEATRELIGHTNZ

## 4 way Compact DMX splitters

## TL-DMX-SP-4

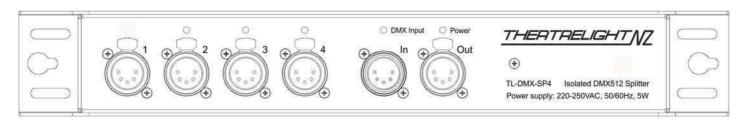

These portable Theatrelight DMX splitters can be mounted anywhere- in a cabinet, wall mounted or tied to a lighting bar.

The splitters present a very low load to the DMX line: up to 50 splitters can be paralled on a single DMX feed, ideal for very large LED displays. The internal circuitry re-shapes any slow edges in the incoming DMX signal and retransmits the enhanced signal through low impedance, high current RS-485 transmitters.

All input and output DMX lines are isolated from each other by 500 VAC tested insulation.

For long-term reliability in noisy power conditions, no microprocessor is used in the signal path.

The **SP4-5** version is fitted with Neutrik 5 pin XLRs for compliance to the DMX standard. The **SP4-3** is fitted with Neutrik 3 pin XLR for installations which use 3 pin as a standard.

Both the 3 pin and 5 pin version can also be supplied on request with generic brand gold plated XLRs for installations where economy is important.

## **Features**

- Fully compliant with DMX-512 (1990) specification
- Input isolated from outputs to 500VAC
- Outputs are opto-isolated from each other to 500VAC
- · LEDS for Power and DMX Input status
- LEDs for DMX status at each of the 4 outputs
- Compact mount-anywhere package
- Components and circuitry ensure long-term reliability
- 3 pin or 5 pin XLR versions in Neutrik or economic generic brands

