

LRX MINI

Wireless DMX Recivers



- Wireless DMX and RDM receivers
- Lightweight, portable, and economical
- Lumen Radio CRMX standard, WDMX compatible
- IEC universal mains and USB power options
- Internal or external high gain antenna
- Fully isolated DMX output
- Velcro strap for mounting on luminaires

info@theatrelight.co.nz
www.theatrelight.co.nz
info@tl-asia.com
www.tl-asia.com

THEATRELIGHT NZ

LRX MINI DESCRIPTION

Designed to add economical Wireless DMX to any DMX512 lighting fixture, these single universe receivers are small and light enough to be tied to a lighting bar or the yoke of a luminaire using its built-in Velcro ties. Each LRX Mini can provide DMX for 5 fixtures. It is available in DMX and RDM types, in two power options: universal mains by IEC cable or 5 volt USB cable for use with large film and TV lights fitted with USB connectors.


All models are based on original OEM PCBs from Lumen Radio known for their reliable frequency hopping CRMX™ protocol. The LRX Mini is also able to receive Wireless Solution's W-DMX™ signals. The universal mains IEC powered DMX and RDM versions have an internal antenna for use in theatres. The DMX and RDM USB versions are fitted with an external high gain antenna for increased range on large Film sets, TV Studios, or larger outdoor venues. The useful range of the receivers is approximately 500 meters where clear of obstructions such as solid walls, and when used with a transmitter such as Theatrelight's SPLRX. Operator Instructions are printed on the unit for ease of use.

LRX MINI FEATURES


- Units are fitted with Velcro ties for mounting to any fixture or lighting bar
- LR Mini receives both Lumen Radio CRMX™ and Wireless Solution W-DMX™ signals
- Five pin XLR socket on 0.5meter cable for plugging into the DMX/RDM socket of any DMX fixture (three pin XLR connectors available to order)
- DMX and RDM output surge protected for maximum reliability
- DMX output isolated to 500vdc (IEC mains version only)
- DMX status LED shows DMX status
- Link key for unlinking the unit from its current transmitter
- Link LED (internal to the Link key) shows Link status
- Full operating instructions printed on the front panel

For full details about the CRMX™ standard see: www.lumenradio.com

For full details about the W-DMX™ standard see: www.wirelessdmx.com.

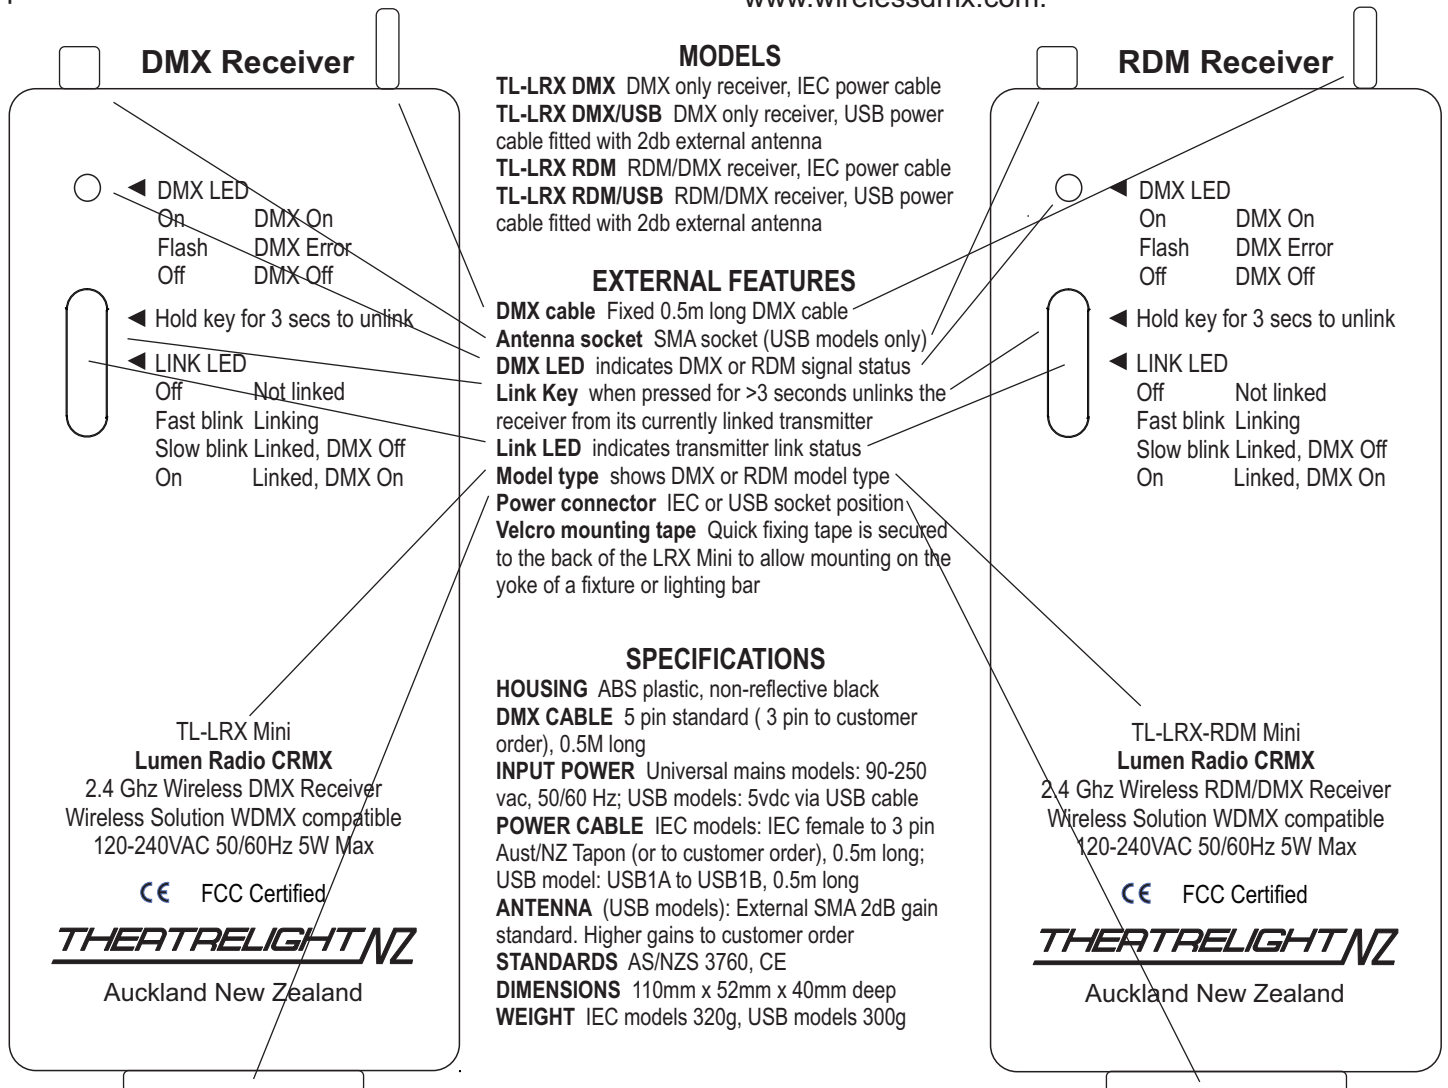

Your Local Distributor:



THEATRELIGHT NZ

Theatrelight NZ, 6 Rowe St. Onehunga, Auckland, New Zealand
Tel: 64-9-622 1187, Fax: 64-9-636 5803, info@theatrelight.co.nz
Theatrelight Asia, San Xiang, Zhongshan, Guangdong Province, PRC
Tel: 86-760-8632-0516, Fax: 86-760-8632 051, info@tl-asia.com
Internet: www.theatrelight.co.nz, www.tl-asia.com